



best water solutions

supreme



SUPREME MULTI SERIES: Professional multifunctional system

Advantages:

- Warranty up to 10 years!
- Highest quality ECOMIX® multifunctional bed.
- Electronic volume control valve.
- Backlit LCD screen with menu in English.
- Washings hoses included.
- High quality workmanship.



Product description:

Modern **SUPREME MULTI** multifunctional system is an innovative device that solves the problems with the five most commonly encountered contaminants present in the water: iron, manganese, organic compounds, ammonia, and water hardness.

- | | | |
|----------------------|---|-----------------|
| 1. IRON | 1 | DEVICE |
| 2. MANGANESE | | |
| 3. ORGANIC COMPOUNDS | 5 | SOLVED PROBLEMS |
| 4. HARDNESS | | |
| 5. AMMONIA | | |



www.supremefilters.com

Technical information:

Technical information:

Type	SUPREME MULTI 24
Working pressure min./max.	1,4 bar / 8,3 bar
Working temperature min./max.	2°C - 48°C
Electrical connector	230/50 V/Hz
Maximum power consumption	17 W
Hydraulic connection inlet/outlet	external thread 3/4" BSP

System information:

Type of control	Electronic-volumetric
Bed type	Highest quality ECOMIX® multifunctional bed
Regenerating agent type	Tablet salt
Regeneration system	Countercurrent

Performance⁽¹⁾:

Bed volume (dm ³)	24
Nominal exchange capacity (m ³ x°f)	91,2
Nominal exchange capacity (m ³ x°d)	50,9
Salt consumption for regeneration (kg) ⁽²⁾	2,4
Maximum recommended operating flow (m ³ /h)	1,3
Nominal value for the backwash (l/min.)	9,8
Rinse water consumption for regeneration (at 3 bar) (litre) ⁽²⁾	205

⁽¹⁾ Approximate sizes and performance depend on the operating conditions and water quality.
⁽²⁾ Maximum consumption of salt / water with proportional salinity (minimum 60%).

Weight and Dimensions:


Width (mm)	345
Height (mm)	1084
Depth (mm)	573
Depth, including bypass (mm)	658
Height inlet/outlet (mm)	933
Height inlet/outlet, including bypass (mm)	939
Weight (kg)	35,5
Weight, including bypass (kg)	36,0
Maximum storage capacity of salt (kg)	125

Limits of application:

TYPE	SUPREME MULTI 24						
	hardness		iron	manganese	oxidation	ammonia	pH
Concentration of pollutants	°f	°dH	mg/l	mg/l	mg/l O ₂	mg/l	
Raw water	<75	<42	<15	<3	<4	<4	5-10
Treated water	<2,5	<1,4	<0,3	<0,1	<2	<0,5	/



Backlit LCD screen with menu in English

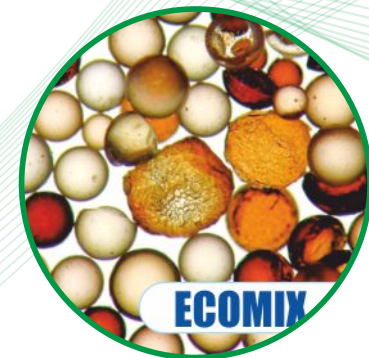

Highest quality ECOMIX® multifunctional bed



A BY-PASS valve (optional) and original SUPREME accessories

